


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDT11N-G/S/ 80W/2
光束	1400 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

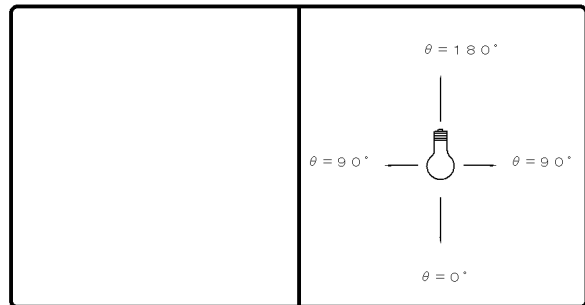

効率	F	%
	F	%
	F	100 %
	器具光束	1400 lm

最大取付間隔	
A-A	2.26 H
B-B	2.26 H

備考	
----	--

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	60		
10°	68		
20°	81		
30°	92		
40°	100		
50°	104		
60°	105		
70°	102		
80°	97		
90°	91		
100°	85		
110°	77		
120°	68		
130°	57		
140°	45		
150°	31		
160°	17		
170°	5		
180°	0		

反射率 (%)	天井		80				70				50				30		20	0		
	壁	床	70	50	30	70	50	30	70	50	30	50	30	30	10	0				
室指数	照明率 (×0.01)																			
0.60	49	45	34	33	25	25	45	42	32	30	24	23	27	26	20	20	17	17	12	8
0.80	59	54	44	41	34	32	54	50	40	38	31	30	34	33	27	26	23	22	17	12
1.00	66	59	50	47	40	38	60	55	47	44	37	36	40	38	32	31	27	26	20	15
1.25	73	65	58	53	47	44	67	60	54	50	44	42	46	43	38	36	32	31	25	19
1.50	78	69	64	58	53	49	71	64	59	54	49	46	50	47	42	40	36	35	28	22
2.00	86	75	73	65	63	57	79	70	68	61	58	54	57	53	50	47	42	41	34	27
2.50	91	79	79	70	70	63	83	73	73	66	64	59	62	57	55	52	46	45	38	30
3.00	95	81	84	74	75	67	87	76	78	69	69	63	65	60	59	55	50	48	41	33
4.00	100	85	91	79	83	73	92	80	84	74	77	69	70	64	65	60	55	52	45	37
5.00	103	87	95	82	88	77	95	82	88	77	81	72	74	67	69	63	58	55	49	40
10.00	111	93	106	89	101	86	102	87	97	84	93	81	82	74	79	72	66	63	56	48

