


■ 東芝ランプ 配光データシート

名 称	東芝LED電球
形 名	LDA4N-G/40W
光 束	485 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

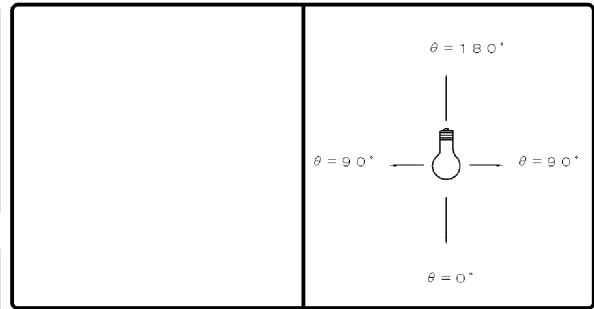

効 率	F		%
	F		%
	F	100	%
	器具 光束	485	lm

最大取付間隔	
A-A	1.48 H
B-B	1.48 H

備 考	
--------	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	109		
10°	107		
20°	107		
30°	106		
40°	105		
50°	104		
60°	101		
70°	98		
80°	92		
90°	86		
100°	79		
110°	70		
120°	62		
130°	53		
140°	44		
150°	36		
160°	29		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50				30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数		照 明 率 (×0.01)																			
0.60		50	46	36	34	27	26	46	43	33	32	25	25	29	28	22	22	19	19	14	10
0.80		60	55	45	42	35	34	56	51	42	40	33	32	36	35	29	28	25	25	19	15
1.00		67	60	52	48	42	40	62	56	48	45	39	37	42	39	34	33	29	29	23	18
1.25		74	66	59	54	49	46	68	61	55	51	46	43	47	45	40	38	34	33	27	22
1.50		79	69	65	59	54	51	72	65	60	55	51	48	51	48	44	42	38	37	30	24
2.00		87	76	74	66	64	59	80	71	69	62	60	55	59	54	52	49	44	43	36	29
2.50		92	79	80	71	71	64	84	74	74	67	66	60	63	58	57	53	48	46	40	33
3.00		96	82	85	74	76	68	88	77	78	70	71	64	67	61	61	57	52	49	43	36
4.00		101	85	92	79	84	74	92	80	85	75	78	69	72	66	67	61	56	54	47	40
5.00		104	88	96	82	89	77	95	82	88	77	82	73	75	68	70	65	60	57	50	42
10.00		111	93	106	89	101	86	102	87	98	84	94	82	83	75	80	73	68	64	58	50

