


■ 東芝ランプ 配光データシート

名 称	LEDランプ
形 名	LDA7L-H/60W
光 束	810 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

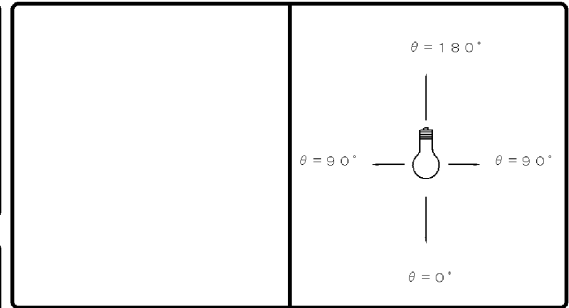

効 率	F		%
	F		%
	F	100	%
	器具 光束	810	lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	229		
10°	224		
20°	212		
30°	194		
40°	171		
50°	147		
60°	122		
70°	100		
80°	79		
90°	61		
100°	46		
110°	35		
120°	27		
130°	21		
140°	17		
150°	13		
160°	11		
170°	8		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数		照 明 率 (×0.01)																						
0.60		56	52	42	40	33	32	53	50	40	38	32	31	37	36	30	29	28	28	23	20			
0.80		67	61	52	49	43	41	64	58	50	47	41	40	46	44	39	38	36	35	30	27			
1.00		74	67	59	55	49	47	70	64	57	53	48	46	52	49	45	43	41	40	35	32			
1.25		82	72	67	62	57	54	77	69	64	59	55	52	59	55	51	49	47	46	40	37			
1.50		86	76	73	66	63	58	82	73	69	64	60	57	63	59	56	53	52	50	44	40			
2.00		95	82	82	74	73	66	89	79	78	71	70	64	71	66	64	61	59	57	51	47			
2.50		99	86	88	78	79	72	94	82	84	75	76	69	76	70	69	65	64	61	56	51			
3.00		103	88	93	82	85	76	97	85	88	79	81	73	80	73	74	69	67	64	59	54			
4.00		108	92	100	86	92	81	102	88	94	83	88	79	85	78	80	74	72	69	64	59			
5.00		111	94	104	89	97	85	104	90	98	86	92	82	88	80	84	77	76	72	67	62			
10.00		118	98	113	96	109	93	111	95	107	92	103	90	96	86	93	84	84	79	75	70			

