


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDR100/200V 13N-H
光束	1600 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

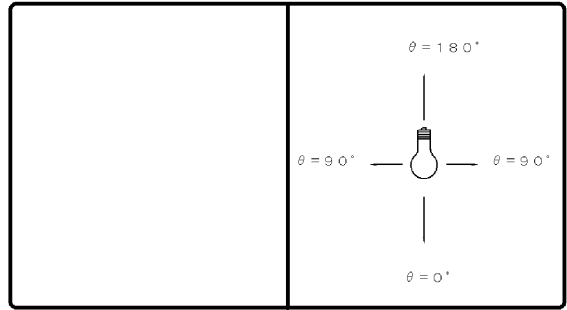

効 率	F		%
	F		%
	F	100	%
	器具 光束	1600	lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	324		
10°	320		
20°	308		
30°	283		
40°	249		
50°	212		
60°	164		
70°	84		
80°	19		
90°	19		
100°	16		
110°	5		
120°	1		
130°	1		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		30		10		0														
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10													
室指数	照 明 率 (×0.01)																																															
0.60	62	57	47	45	39	38	60	55	46	44	38	37	45	43	37	37	37	36	31	29																												
0.80	74	67	60	56	51	49	72	66	59	55	50	48	56	54	49	47	47	46	42	40																												
1.00	81	73	68	63	58	55	79	71	66	62	57	55	63	60	56	54	54	52	48	46																												
1.25	89	79	76	70	67	63	86	78	74	69	66	62	71	67	63	61	61	59	55	52																												
1.50	94	83	82	75	73	68	91	81	80	73	72	67	76	71	69	66	66	64	60	57																												
2.00	103	89	92	82	84	76	99	88	89	81	82	76	84	78	78	74	75	72	68	65																												
2.50	107	93	98	87	90	81	103	91	95	85	88	80	89	83	84	78	80	77	73	70																												
3.00	111	95	103	90	96	85	107	93	99	88	93	84	93	86	88	82	84	80	77	74																												
4.00	116	98	109	94	103	90	111	96	105	93	100	89	98	90	94	87	89	85	82	79																												
5.00	118	100	112	97	107	93	114	98	108	95	104	92	101	92	98	90	92	87	85	82																												
10.00	124	104	121	102	118	100	119	102	116	100	113	99	108	97	106	96	99	93	91	89																												

